



Quote

Quote QTE36091
 Date 8/2/2016
 Page 1

5705 Commander Dr. Arlington, TN 38002-0587
 (901) 867-0039 (800) 552-6331 Fax (901) 867-4008

Bill To:
 EDSA
 JEFF SUITER
 FL

Ship To:
 EDSA
 JEFF SUITER
 FL

Purchase Order No.	Customer ID EDSA	Shipping Method FREIGHT	Payment Terms	Req Ship Date 0/0/0000	Master No. 77,903
--------------------	---------------------	----------------------------	---------------	---------------------------	----------------------

Quantity	Item Number	Description	UOM	Discount	Unit Price	Ext. Price
6	564 SMSS	564 SMSS W/GRAB BARS	EA		3,310.00	\$19,860.00
6	KIT HB/SS COVER	TEXTURED SAPPHIRE WOODFORD HYDRANT ATTACHED TO FOUNTAIN W/SS HB COV SHIPPING IS INCLUDED IN UNIT PRICE.	EA		420.00	\$2,520.00


CURRENTLY OUR PRODUCTION LEAD TIME IS APPROXIMATELY 3 WEEKS ONE YEAR WARRANTY. LABOR NOT INCLUDED PRICES SUBJECT TO CHANGE WITHOUT NOTICE	Subtotal	\$22,380.00
	Freight	\$0.00
	Total	\$22,380.00


Original



564 SMSS

WI RECESSED HOSE BIBB
SHOWN W/OPTIONAL TEMPLATE

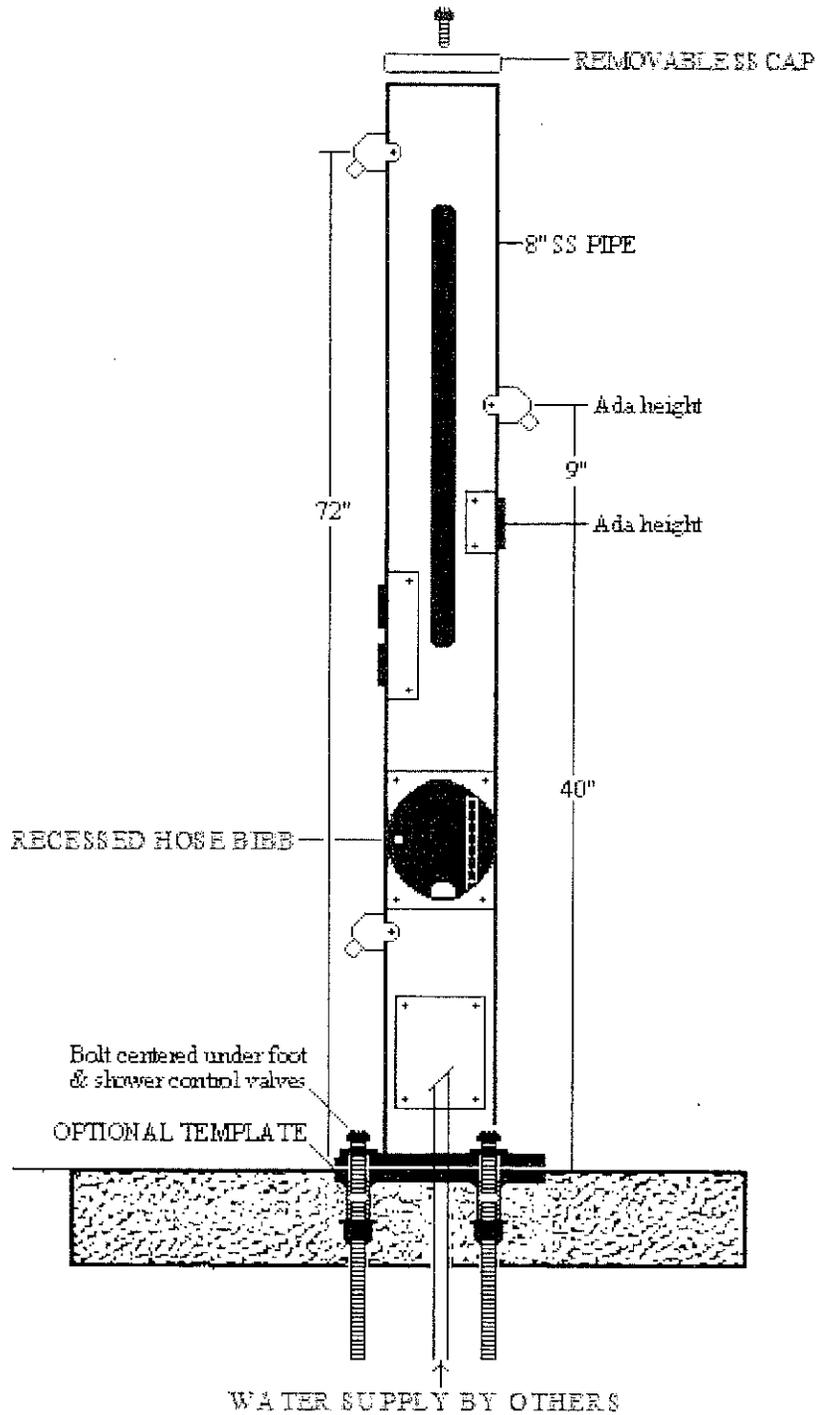



564 SMSS SPECIFICATIONS

STAINLESS STEEL PEDESTAL

One piece weld construction with MDF standard 304 schedule 10 stainless steel.

PUSH BAR

304 stainless steel with circumference exceeding 8.6". Mushroom style push bar overlaps and prevents sand and other objects from sticking push bar in the ON position. Stainless steel bubbler housing standard.

SPRAY HEADS

1.5 GPM at 60 PSI.

CONTROL VALVE

Shower heads - metered valves. Foot wash - self closing valve. Requires less than 5 lbs to operate. This valve design is to operate and function at 30 to 80 PSI. Ideal operating pressure is 60 PSI.

WATER SUPPLY (LEAD FREE)

Maintenance free reinforced nylobraid tubing that is NSF-61 certified. **This tubing is not plastic.** It is supplied with a 1/2" MIP threaded inlet with stainless steel strainer. Union fittings at every connection. Supply line stops above grade.

INSTALLATION

Surface Mount installation, is designed to be anchored on top of an existing surface (concrete, etc.) with anchor bolts through a mounting plate that is welded to the unit. Surface mount carrier recommended for all surface mount installations. Access door standard on all pedestal units.

FINISH

Oven baked powder coat. Textured Sapphire - Color to be verified by Landscape Architect prior to manufacturing.

SPECIFIED OPTIONS

External hose bibb with locking cover.

WINTERIZATION

Shut off water and drain down.

WARRANTY

One year warranty, labor not included.

SHIPPING WEIGHT

Model 564 SMSS.....160 lbs

MOST DEPENDABLE FOUNTAINS, INC.™
(800) 552-6331 • (901) 867-0039 • Fax (901) 867-4008
5705 COMMANDER DR. • ARLINGTON, TN 38002-0587
www.mostdependable.com





Quote

Quote QTE36093
 Date 8/2/2016
 Page 1

5705 Commander Dr. Arlington, TN 38002-0587
 (901) 867-0039 (800) 552-6331 Fax (901) 867-4008

Bill To:
 EDSA
 JEFF SUITER
 FL

Ship To:
 EDSA
 JEFF SUITER
 FL


Purchase Order No.	Customer ID	Shipping Method	Payment Terms	Req Ship Date	Master No.	
	EDSA	FREIGHT		0/0/0000	77,906	
Quantity	Item Number	Description	UOM	Discount	Unit Price	Ext. Price
24	500-8 SMSS	SINGLE FT & SHOWER OUTLET ON 8"SS PIPE-SURFACE MT	EA		2,025.00	\$48,600.00
24	KIT HB/SS COVER	TEXTURED SAPPHIRE WOODFORD HYDRANT ATTACHED TO FOUNTAIN W/SS HB COV	EA		420.00	\$10,080.00
24	METERED VALVE	3/8" 15-30 SECOND SLOW CLOSING METERED VALVE (3G)	EA		212.00	\$5,088.00
24.000	MISC ITEMS	MISC ITEMS TOWEL KNOB SHIPPING IS INCLUDED IN UNIT PRICE	EA		40.00	\$960.00


CURRENTLY OUR PRODUCTION LEAD TIME IS APPROXIMATELY 3 WEEKS ONE YEAR WARRANTY. LABOR NOT INCLUDED PRICES SUBJECT TO CHANGE WITHOUT NOTICE <p style="text-align: center;">Original</p>	Subtotal	\$64,728.00
	Freight	\$0.00
	Total	\$64,728.00



500-8 SMSS

- W/ (1) METERED VALVE FOR SHOWER
- W/ (1) VALVE BODY III FOR FOOTWASH
- W/ (1) TOWEL KNOB
- W/ RECESSED HOSE BIBB
- SHOWN W/ OPTIONAL TEMPLATE

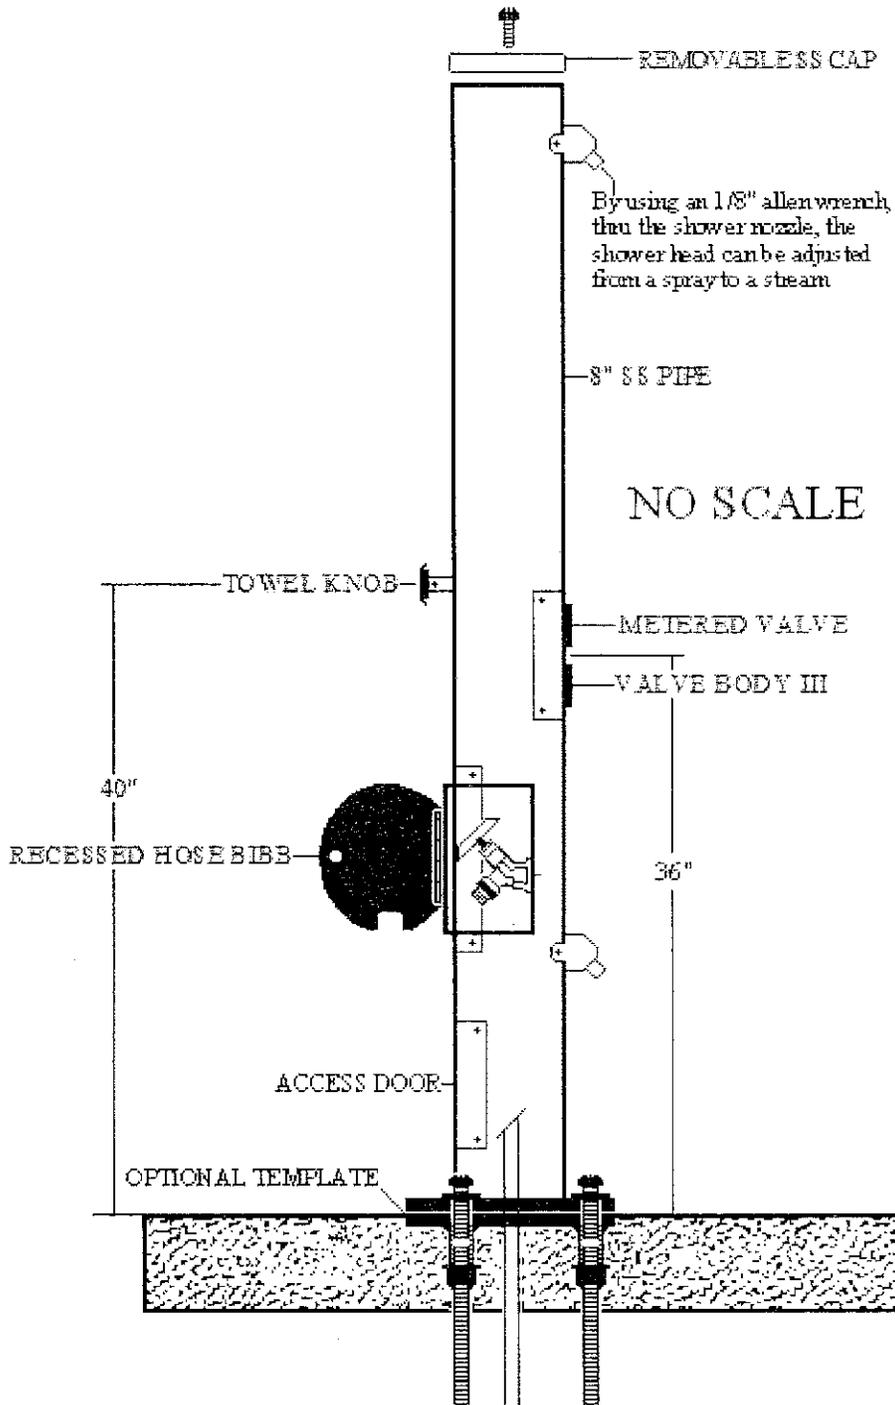



500-8 SERIES FOOT & SHOWER TOWER SPECIFICATIONS

STAINLESS STEEL PEDESTAL	One piece weld construction with MDF standard 304 schedule 10 stainless steel.
PUSH BAR	304 stainless steel with circumference exceeding 8.6". Mushroom style push bar overlaps and prevents sand and other objects from sticking push bar in the ON position. Stainless steel bubbler housing standard.
SPRAY HEADS	1.5 GPM at 60 PSI.
CONTROL VALVE	Shower head - metered valve. Foot wash - self-closing valve. Requires less than 5 lbs to operate. This valve design is to operate and function at 30 to 80 PSI. Ideal operating pressure is 60 PSI.
WATER SUPPLY (LEAD FREE)	Maintenance free reinforced nylobraid tubing that is NSF-61 certified. This tubing is not plastic. It is supplied with a 1/2" MIP threaded inlet with stainless steel strainer. Union fittings at every connection. Supply line stops above grade.
INSTALLATION	Surface Mount installation, is designed to be anchored on top of an existing surface (concrete, etc.) with anchor bolts through a mounting plate that is welded to the unit. Surface mount carrier recommended for all surface mount installations. Access door standard on all pedestal units.
FINISH	Oven baked powder coat. Textured Sapphire - Color to be verified by Landscape Architect prior to manufacturing.
SPECIFIED OPTIONS	External hose bibb with locking cover Metered valves Towel knob
WINTERIZATION	Shut off water and drain down.
WARRANTY	One year warranty, labor not included.
SHIPPING WEIGHT	Model 500-8 SMSS.....130 lbs.

MOST DEPENDABLE FOUNTAINS, INC.™
(800) 552-6331 • (901) 867-0039 • Fax (901) 867-4008
5705 COMMANDER DR. • ARLINGTON, TN 38002-0587
www.mostdependable.com





Quote

Quote	QTE36094
Date	8/2/2016
Page	1

5705 Commander Dr. Arlington, TN 38002-0587
 (901) 867-0039 (800) 552-6331 Fax (901) 867-4008


Bill To:
 EDSA
 JEFF SUITER
 FL

Ship To:
 EDSA
 JEFF SUITER
 FL

Purchase Order No.	Customer ID EDSA	Shipping Method FREIGHT	Payment Terms	Req Ship Date 0/0/0000	Master No. 77,908
--------------------	---------------------	----------------------------	---------------	---------------------------	----------------------

Quantity	Item Number	Description	UOM	Discount	Unit Price	Ext. Price
3	10155 SMSS W/CHILLER	10155 SMSS W/CHILLER TEXTURED SAPPHIRE SHIPPING IS INCLUDED IN UNIT PRICE.	EA		5,380.00	\$16,140.00


CURRENTLY OUR PRODUCTION LEAD TIME IS APPROXIMATELY 3 WEEKS ONE YEAR WARRANTY. LABOR NOT INCLUDED PRICES SUBJECT TO CHANGE WITHOUT NOTICE <p style="text-align: center;">Original</p>	Subtotal	\$16,140.00
	Freight	\$0.00
	Total	\$16,140.00




MOST DEPENDABLE
FOUNTAINS

10155 smss w/chiller

W/FILTERED WATER STATION
W/SELF CLOSING VALVE BODY III
W/PET FOUNTAIN
SHOWN W/OPTIONAL TEMPLATE

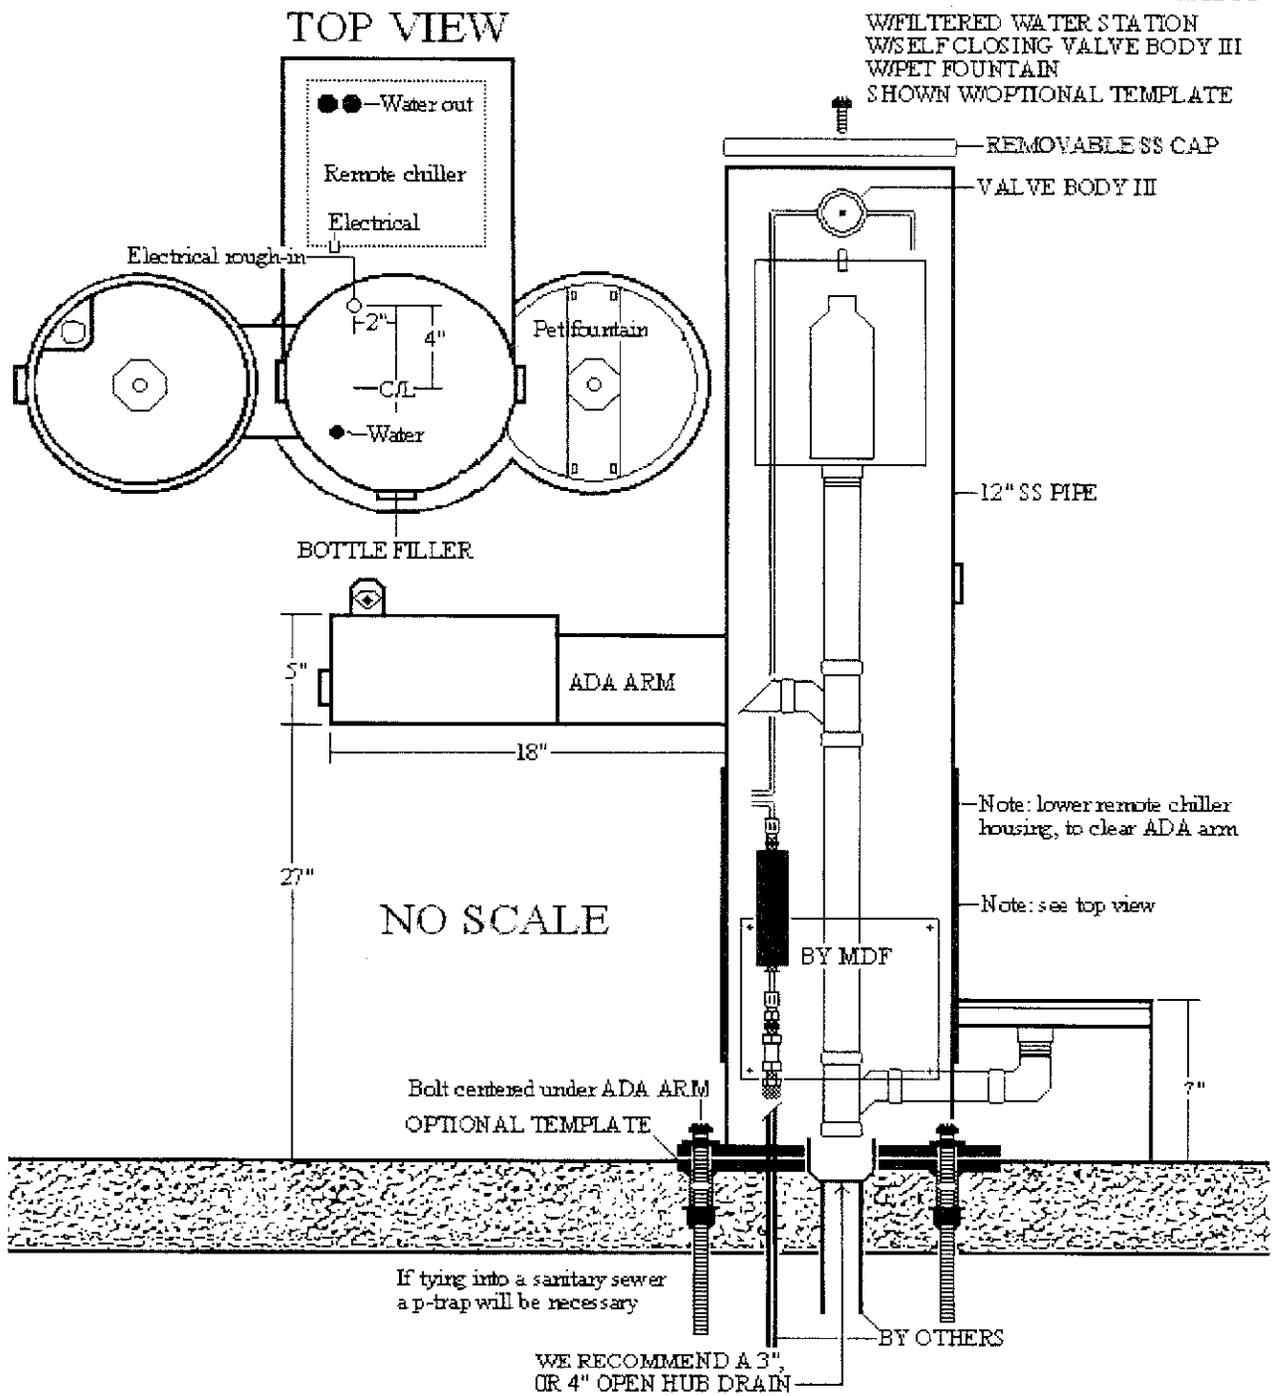



10155 SMSS CHILLED SPECIFICATIONS

WATER QUALITY (LEAD FREE)

Section 9, California Proposition 6 and the Federal Safe Drinking Water Act.

STAINLESS STEEL PEDESTAL

One piece weld construction with MDF standard 304 schedule 10 stainless steel.

RECEPTOR BOWL

18 gauge electro-polished stainless steel bowl. Bowl overlaps pedestal, preventing buildup of residue in visual drinking area. Optional stainless steel Bowl Strainer recommended for areas with sand. Not applicable on Model 10125 SMSS.

BOTTLE FILLER SPOUT

Sanitary recessed nozzle.

BUBBLER HEAD

Stainless steel anti-squirt head (weighing a pound and a half) mounted with a lock nut and washer to prevent tampering. Lock nut pin holds bubbler in locked position to prevent twisting or turning. The MDF bubbler head has a unique design that features a steady stream trajectory and a built in natural shield from contamination.

PUSH BAR

304 stainless steel with circumference exceeding 8.6". Mushroom style push bar overlaps and prevents sand and other objects from sticking push bar in the ON position. Stainless steel bubbler housing standard.

CONTROL VALVE

Requires less than 5 lbs to operate. Non-cartridge O-ring valve delivers steady stream of water through an adjustable valve. This valve design is to operate and function at 30 to 80 PSI. Ideal operating pressure is 60 PSI.

WATER SUPPLY (LEAD FREE)

Maintenance free reinforced nylobraid tubing that is NSF-61 certified. **This tubing is not plastic.** It is supplied with a 1/2" MIP threaded inlet with stainless steel strainer. Union fittings at every connection. Supply line stops above grade. Water Filter is standard on this model.

DRAIN

1 1/2" schedule 40 PVC pipe. Drain line stops above grade.

FINISH

Oven baked powder coat. Textured Sapphire - Color to be verified by landscape Architect prior to manufacturing.

INSTALLATION

Surface Mount installation, is designed to be anchored on top of an existing surface (concrete, etc.) with anchor bolts through a mounting plate that is welded to the fountain. Surface Mount Fountains provide an access door with vandal resistant stainless steel screws. Surface mount carrier recommended for all surface mount installations. Access door standard on all pedestal fountains.

CHILLER and WINTERIZATION

Chilling capacity 8 gallons per hour. NO lead design. 115 VAC. Shut off water and drain down. Remove water filter and chiller if applicable.

WARRANTY

One year warranty, labor not included.

SHIPPING WEIGHT

Model 10155 SMSS..... 310 lbs

MOST DEPENDABLE FOUNTAINS, INC.™
(800) 552-6331 • (901) 867-0039 • Fax (901) 867-4008
5705 COMMANDER DR. • ARLINGTON, TN 38002-0587
www.mostdependable.com





Quote

Quote QTE36095
 Date 8/2/2016
 Page 1

5705 Commander Dr. Arlington, TN 38002-0587
 (901) 867-0039 (800) 552-6331 Fax (901) 867-4008


Bill To:
 EDSA
 JEFF SUITER
 FL

Ship To:
 EDSA
 JEFF SUITER
 FL

Purchase Order No.	Customer ID EDSA	Shipping Method FREIGHT	Payment Terms	Req Ship Date 0/0/0000	Master No. 77,909
--------------------	---------------------	----------------------------	---------------	---------------------------	----------------------




Quantity	Item Number	Description	UOM	Discount	Unit Price	Ext. Price
3	44018 SMSS	44018 SMSS/REMOTE CHILLERW/DUAL BOWLS (ADA) 234 TEXTURED SAPPHIRE SHIPPING IS INCLUDED IN UNIT PRICE.	EA		4,590.00	\$13,770.00


CURRENTLY OUR PRODUCTION LEAD TIME IS APPROXIMATELY 3 WEEKS ONE YEAR WARRANTY. LABOR NOT INCLUDED PRICES SUBJECT TO CHANGE WITHOUT NOTICE Original	Subtotal	\$13,770.00
	Freight	\$0.00
	Total	\$13,770.00



MOST DEPENDABLE
FOUNTAINS

NOTE:
IF THERE IS A POSSIBILITY OF FREEZING, THE REMOTE
CHILLER MUST BE DISCONNECTED AND STORED, UNTIL
ALL POSSIBILITIES OF FREEZING ARE NON-EXISTENT.

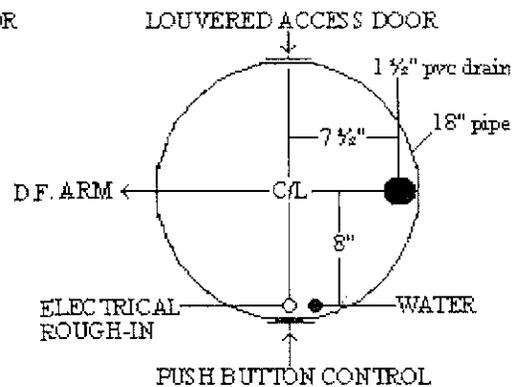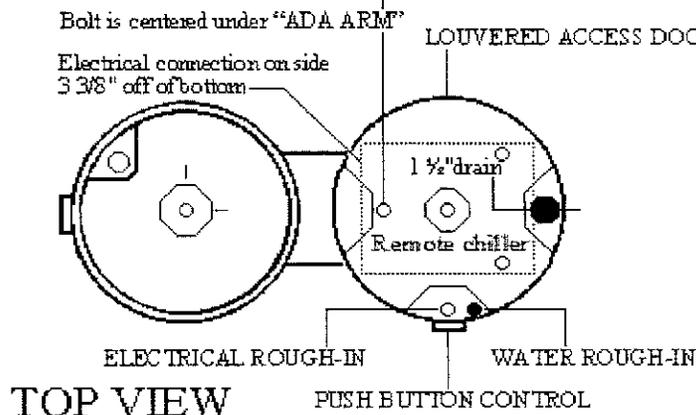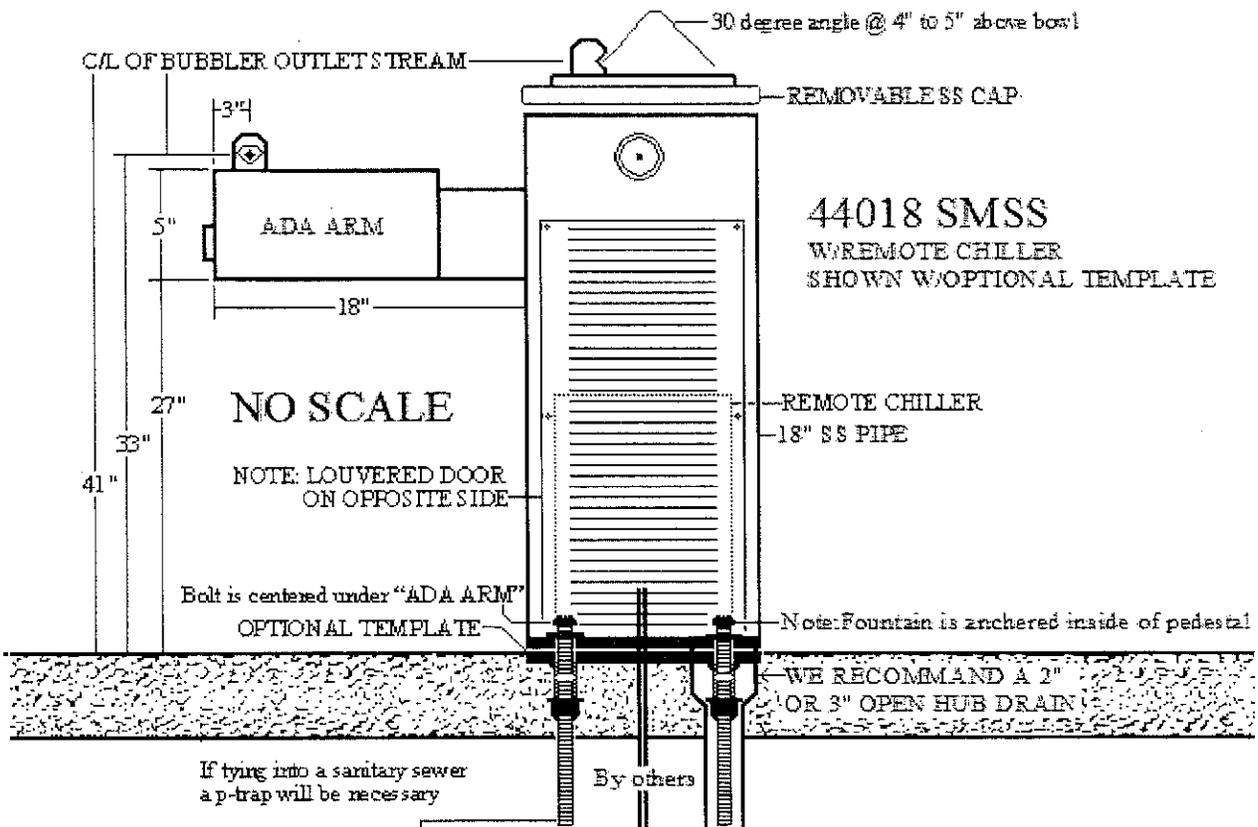



44018 SMSS SPECIFICATIONS

WATER QUALITY (LEAD FREE)	Section 9, California Proposition 6 and the Federal Safe Drinking Water Act.
STAINLESS STEEL PEDESTAL	One piece weld construction with MDF standard 304 schedule 10 stainless steel.
RECEPTOR BOWL	18 gauge electro-polished stainless steel bowl. Bowl overlaps pedestal, preventing build-up of residue in visual drinking area. Optional stainless steel Bowl Strainer recommended for areas with sand.
BUBBLER HEAD	Stainless steel anti-squirt head (weighing a pound and a half) mounted with a lock nut and washer to prevent tampering. Lock nut pin holds bubbler in locked position to prevent twisting or turning. The MDF bubbler head has a unique design that features a steady stream trajectory and a built in natural shield from contamination.
PUSH BAR	304 stainless steel with circumference exceeding 8.6". Mushroom style push bar overlaps and prevents sand and other objects from sticking push bar in the ON position. Stainless steel bubbler housing standard.
CONTROL VALVE	Requires less than 5 lbs to operate. Non-cartridge O-ring valve delivers steady stream of water through an adjustable valve. This valve design is to operate and function at 30 to 80 PSI. Ideal operating pressure is 60 PSI.
WATER SUPPLY (LEAD FREE)	Maintenance free reinforced nylobraid tubing that is NSF-61 certified. This tubing is not plastic. It is supplied with a 1/2" MIP threaded inlet with stainless steel strainer. Union fittings at every connection. Supply line stops above grade.
DRAIN	1 1/2" schedule 40 PVC pipe. Drain line stops above grade.
FINISH	Oven baked powder coat. Textured Sapphire - Color to be verified by Landscape Architect prior to manufacturing.
ACCESS	Working parts accessible through bowl of fountain for easy service. Supply and waste connections are through the above grade access door. All access plates, brackets, vandal resistant bolts and screws are stainless steel.
INSTALLATION	Surface Mount fountains anchor to a concrete pad through a welded mounting plate. SS surface carriers recommended for all new installations. Flush all new or existing supply lines prior to installation.
CHILLER and WINTERIZATION	Chilling capacity 8 gallons per hour. NO lead design. 115 VAC. Shut off water and drain down. Remove chiller if applicable.
WARRANTY	One year warranty, labor not included.
SHIPPING WEIGHT	Model 44018 SMSS.... 235 lbs

MOST DEPENDABLE FOUNTAINS, INC.™
(800) 552-6331 • (901) 867-0039 • Fax (901) 867-4008
5705 COMMANDER DR. • ARLINGTON, TN 38002-0587
www.mostdependable.com

