

90° PARKING



| А | AISLE | 24.0' |
|---|--------------|-------|
| S | STALL WIDTH | 9.0'* |
| D | STALL DEPTH | 18.0' |
| W | MODULE WIDTH | 60.0' |


* COMPACT CAR SPACES -8.0' HANDICAP SPACES -12.0' SEE RT 4.2

<u>PARALLEL</u>



| С | STALL LENGTH | 22.0' |
|---|--------------|-------|
| S | STALL WIDTH | 8.0' |

60° AND 45° PARKING




| STANDARD | | | 60° | 45° |
|--------------------|--|---|-------|-------|
| Α | A AISLE * C STALL LENGTH S STALL WIDTH D STALL DEPTH | | 17.0' | 15.0' |
| С | | | 10.5' | 12.5' |
| S | | | 9.0' | 9.0' |
| D | | | 20.0' | 19.0' |
| W | W MODULE WIDTH | | 57.0' | 53.0' |
| HANDICAP SPACES | | С | 14.0' | 17.0' |
| | | D | 21.5' | 21.0' |
| | | S | 12.0' | 12.0' |

^{*} FOR TWO WAY FLOW A=24.0'

NOTE:

REFER TO TYPICAL PARKING SPACE DETAIL RT 4.2 (A TO C) FOR STRIPING INFORMATION AND HANDICAPPED PARKING DIMENSIONS.

STOP BAR BETWEEN PARKING LOT & PUBLIC R/W MUST BE THERMOPLASTIC.

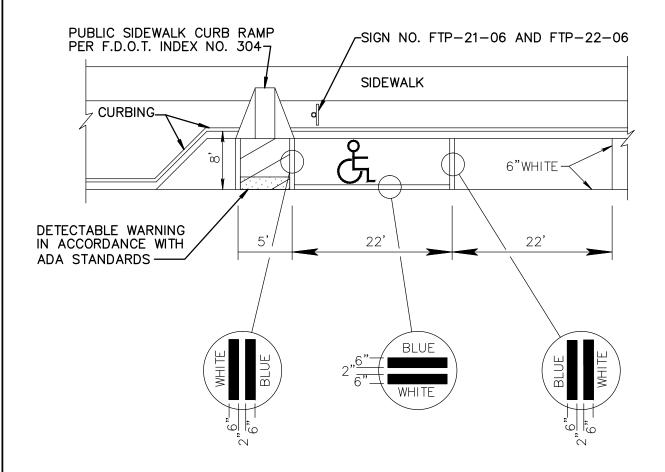

NOTE:

- 1. HANDICAPPED PARKING SPACE MUST BE FIRST OR LAST PARALLEL PARKING SPACE IN THE ROW. ADJACENT TO LANDSCAPE ISLAND. IF SPACE, IS AT THE FRONT OF PARKING ROW ACCESS PANEL MUST BE IN FRONT OF CAR AND IF SPACE IS AT THE END OF PARKING ROW ACCESS PANEL MUST BE AT THE REAR OF CAR.
- 2. WHEN PARKING SPACE IS ADJACENT TO LANDSCAPE ISLAND SPACE MAYBE REDUCED TO 20' FROM THE STANDARD 22' LENGHT.